





# SLC/SLO SHC/SHO 同心型扣环

## 轴用同心型扣环 方形钢丝

当扣环置于适用的轴上沟槽时，从沟槽露出的扣环部分可固定和防止零件移动。

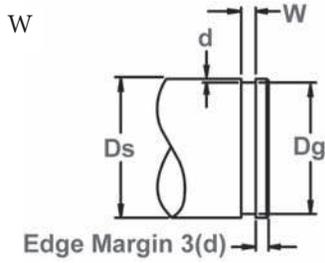

轴承直径&沟槽尺寸

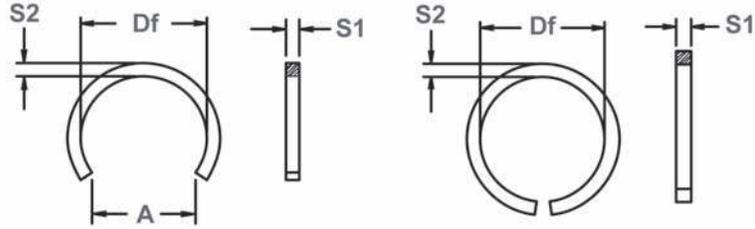

自由直径&扣环尺寸

原材料: SAE 1060-1075

扣环编号		沟槽直径		沟槽尺寸				扣环尺寸						
闭锁型*	开放型*	Ds DEC	Ds mm	Dg	公差	沟槽宽度 W ±.002	深度 d	自由直径 Df	公差	板宽		自由间隙直径 A 最大		
										S1	公差	S2 ±.005		
SHC-25	SH0-25	.250	6.35	.234	+.003	.036	.008	.230	+.000	.031	±.002	.031	.210	
SLC-31	SL0-31	.312	7.92	.296		.036	.008	.290		-.020		.031	.031	.260
SHC-31	SH0-31	.312	7.92	.292		.045	.010	.287		.039		.039	.260	
SLC-37	SL0-37	.375	9.53	.357		.041	.009	.350		.035		.035	.315	
SHC-37	SH0-37	.375	9.53	.351		.052	.012	.344		.046		.046	.310	
SLC-43	SL0-43	.437	11.10	.417		.045	.001	.410		.039		.039	.370	
SHC-43	SH0-43	.437	11.10	.409		.062	.014	.403		.055		.055	.360	
SLC-50	SL0-50	.500	12.70	.476		.052	.012	.469		.046		.046	.420	
SHC-50	SH0-50	.500	12.70	.468		.069	.016	.461		.062		.062	.410	
SLC-56	SL0-56	.562	14.27	.530		.069	.016	.523		.062		.062	.470	
SHC-56	SH0-56	.562	14.27	.526	.078	.018	.519	.071	.071	.465				
SLC-62	SL0-62	.625	15.88	.597	.062	.014	.590	-.025	.055	.055	.525			
SHC-62	SH0-62	.625	15.88	.585	.085	.020	.578	.078	.078	.515				
SLC-68	SL0-68	.687	17.45	.659	.062	.014	.652	.055	.055	.580				
SHC-68	SH0-68	.687	17.45	.647	.085	.020	.640	.078	.078	.570				
SLC-75	SL0-75	.750	19.05	.718	.069	.016	.711	.062	.062	.630				
SHC-75	SH0-75	.750	19.05	.704	.100	.023	.694	.093	.093	.625				
SLC-81	SL0-81	.812	20.62	.780	.069	.016	.773	.062	.062	.690				
SHC-81	SH0-81	.812	20.62	.766	.100	.023	.759	.093	.093	.675				
SLC-87	SL0-87	.875	22.23	.839	.078	.018	.831	.071	.071	.735				
SHC-87	SH0-87	.875	22.23	.821	.117	.027	.813	.109	.109	.725				
SLC-93	SL0-93	.937	23.80	.901	.078	.018	.893	.071	.071	.790				
SHC-93	SH0-93	.937	23.80	.883	.117	.027	.875	.109	.109	.775				
SLC-100	SL0-100	1.000	25.40	.960	±.003	.085	.020	.950	-.035	.078	±.002	.078	.850	
SHC-100	SH0-100	1.000	25.40	.938		.133	.031	.928		.125		.125	.825	
SLC-106	SL0-106	1.062	26.97	1.022		.085	.020	1.012		.078		.078	.895	
SHC-106	SH0-106	1.062	26.97	1.000		.133	.031	.990		.125		.125	.880	
SLC-112	SL0-112	1.125	28.58	1.079		.100	.023	1.068		.093		.093	.950	
SHC-112	SH0-112	1.125	28.58	1.055		.148	.035	1.044		.140		.140	.930	
SLC-118	SL0-118	1.187	30.15	1.141		.100	.023	1.130		.093		.093	1.000	
SHC-118	SH0-118	1.187	30.15	1.117		.148	.035	1.106		.140		.140	.980	
SLC-125	SL0-125	1.250	31.75	1.196		.117	.027	1.184		.109		.109	1.050	
SHC-125	SH0-125	1.250	31.75	1.172		.164	.039	1.160		.156		±.003	.156	1.030
SLC-131	SL0-131	1.312	33.32	1.258	.117	.027	1.246	.109	±.002	.109	1.100			
SHC-131	SH0-131	1.312	33.32	1.234	.164	.039	1.222	.156	±.003	.156	1.085			
SLC-137	SL0-137	1.375	34.93	1.315	.128	.030	1.304	.120	±.002	.120	1.150			
SHC-137	SH0-137	1.375	34.93	1.289	.180	.043	1.276	.172	±.003	.172	1.125			
SLC-143	SL0-143	1.437	36.50	1.377	.128	.030	1.364	.120	±.002	.120	1.205			
SHC-143	SH0-143	1.437	36.50	1.351	.018	.043	1.338	.172	±.003	.172	1.180			
SLC-150	SL0-150	1.500	38.10	1.438	.133	.031	1.424	.125	±.002	.125	1.260			
SHC-150	SH0-150	1.500	38.10	1.406	.195	.047	1.392	.187	±.003	.187	1.245			
SLC-162	SL0-162	1.625	41.28	1.563	.133	.031	1.547	.125	±.002	.125	1.375			
SHC-162	SH0-162	1.625	41.28	1.531	.195	.047	1.516	.187	±.003	.187	1.350			
SLC-175	SL0-175	1.750	44.45	1.672	.164	.039	1.657	.156		.156	1.475			

单位: inch

\* (注): H=重负荷用; L=轻负荷用

硬度: 全尺寸: HRC 46 ~ 53

